


KYIP10°-12° Inclined Passenger-Conveyor Layout Drawing

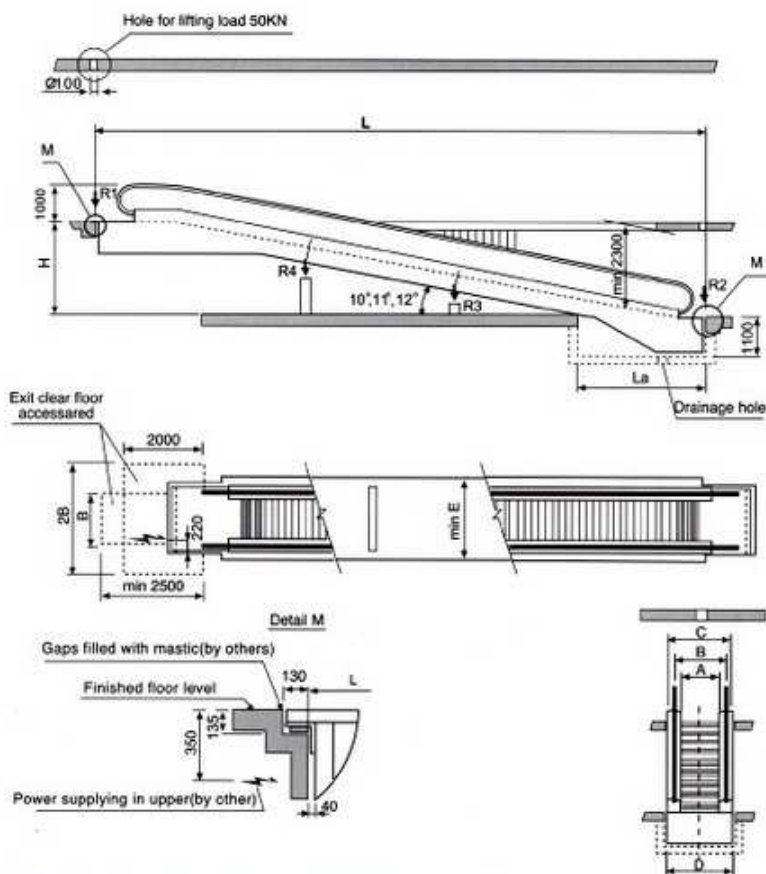

Type	A	B	C	D	E	K1	K2	Speed
KYIP-800	800	1110	1400	1460	2110	15000	30000	V=0.5m/s
KYIP-1000	1000	1310	1600	1660	2310	15000	30000	

Incline	10	11	12
L	Hx5.6713+2646	Hx5.1446+2550	Hx4.7046+2470
La	4650	4350	4050

- All dimensions in (mm).
- As $L > K1$, one intermediate support is needed
- As $L > K2$, two intermediate support is needed.